

Product Specifications

SOLAR POWER GENERATOR - G30 / G40

designed for solar power with AC quick charge provision


off-grid for commercial use

ZeroSUN™ technology

Operating Temperature: -25C to +55C

Output: 110VAC/60hz - 12VDC


Warranty: 4 Years



Rated Output 1000W
 Max Output 1600W
 Output V 90 - 264V programmable
 Current A 0 - 33.5A programmable
 Inverter COTEK 800W-24V
 Communication Port for RS232 & RS485

Commercial applications
 Output ports can be customized
 Compact design for mobility
 Wireless Monitoring

G30 Operating Hrs/Day vs Power Output

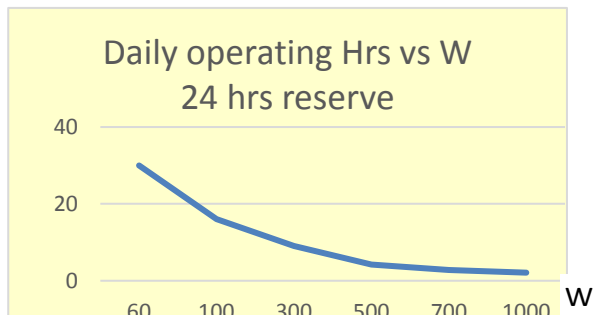

Host cabinet with detachable Panels

Models	Power	Output	PV Panel	Battery	Size	Weight
G30	1000W	110VAC	36VDC 600	24V-200AH GEL	20"x22"x22"H	280 lbs

Protection: Overload; Overcharge; High/Low voltage; High Temperature

Features:

- AC output 110V/60Hz - 1 receptacle
- DC output 12V - 3 receptacles
- Plug-in Connectors
- Mobile unit on removable casters
- Battery charge level monitor
- UL-CUL approved inverter
- 120VAC charge input
- Simple replacement of batteries
- Extended Warranty available 5-10 years



Product Specifications




G40

Rated Output 2000W
 Max Output 2500W
 Output V 90 - 264V programmable
 Current A 0 - 33.5A programmable
 Inverter COTEK 800W-24V
 Communication Port for RS232 & RS485

Commercial - Industrial applications
 Output ports can be customized
 Compact design for mobility
 Wireless Monitoring

G40 Operating Hrs/Day vs Power Output

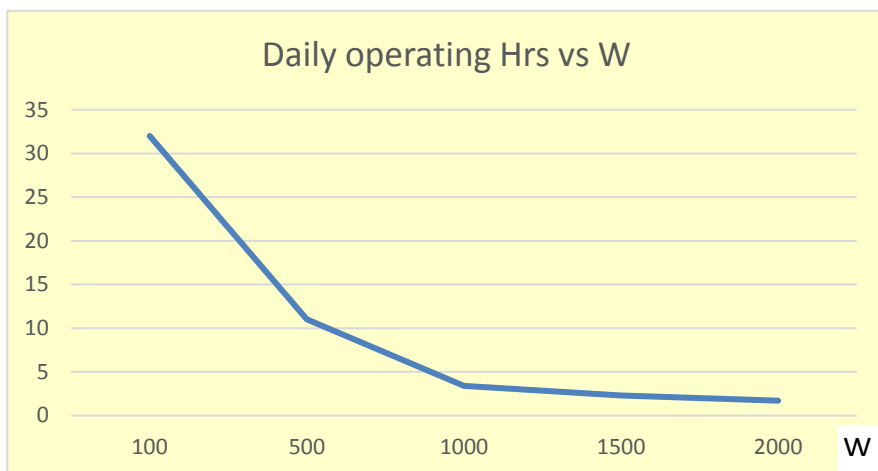

Models	Power	Output	PV Panel	Battery	Size	Weight
G40	2000W	110VAC	36VDC 900W	24V-300AH GEL	21"x22"x36"H	520 lbs



Detachable PV panels



Host cabinet with detachable Panels

